


Requirements:

- Windows 7 or Windows 8
-
- Pre-existing Installation of CreativeStudio
- Downloaded CreativeStudio update file
- USB Flash Drive
- Controller firmware that is Q4, R, R2 or greater




Instructions:


1. Uninstall the previous version of CreativeStudio (ie: 1.0, 4.2, 5.0 etc)
 - a. **Windows 7:** Click the Start button in Windows and chose **Control Panel**.

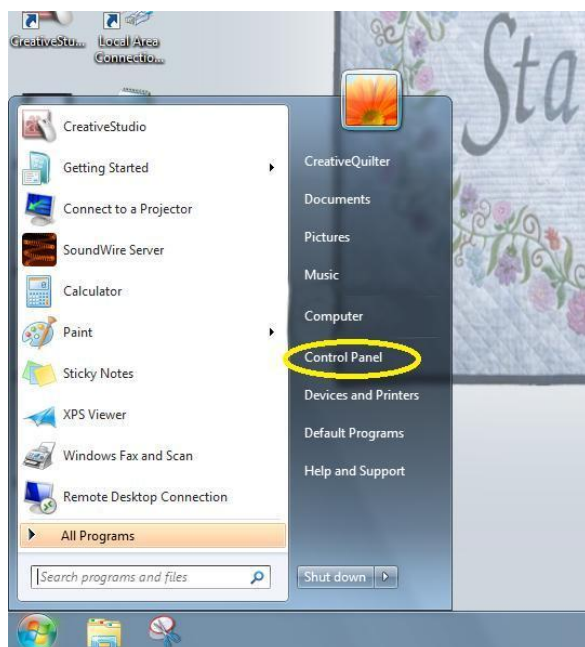


b. **Windows 7:** Choose **Programs and Features**.

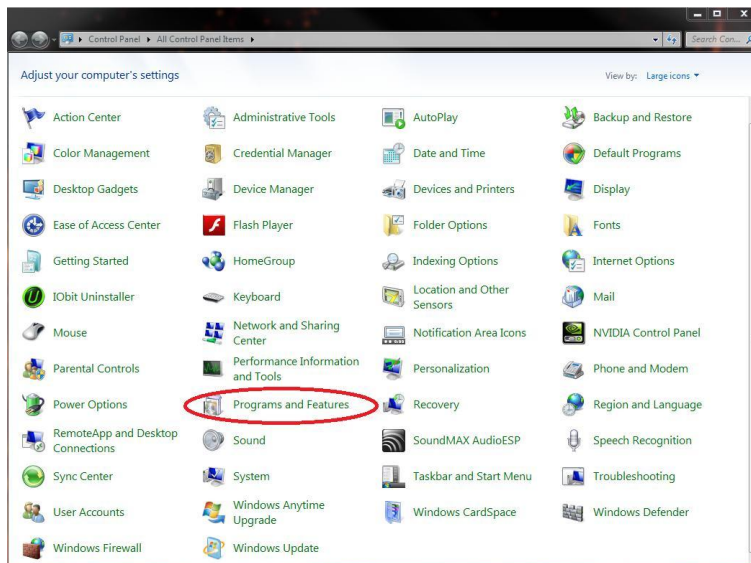


c. **Windows 8:** Right click the Window logo, pick **Programs and Features**.

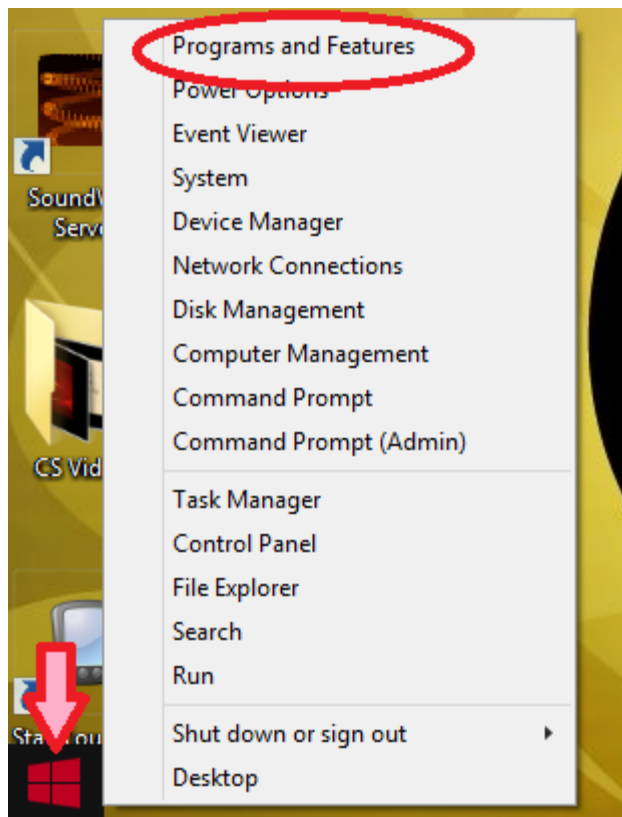


d. Highlight CreativeStudio and choose **Uninstall** near the top of the screen.

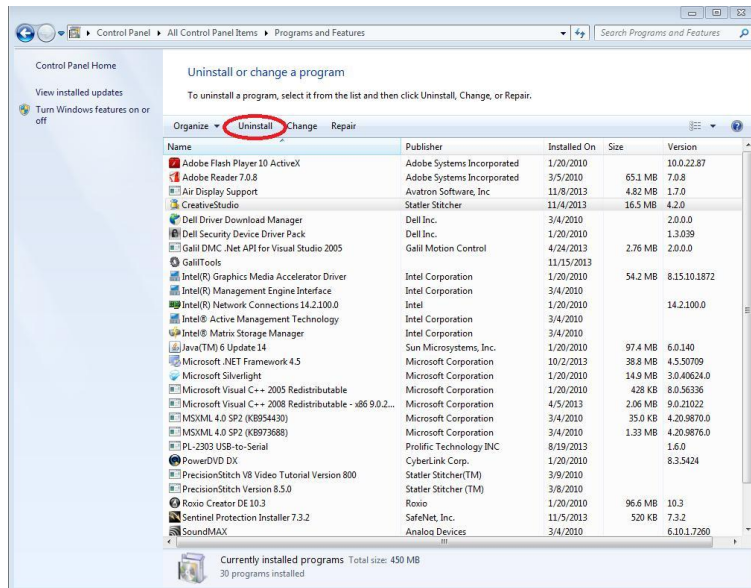

e. When prompted answer **Yes**.

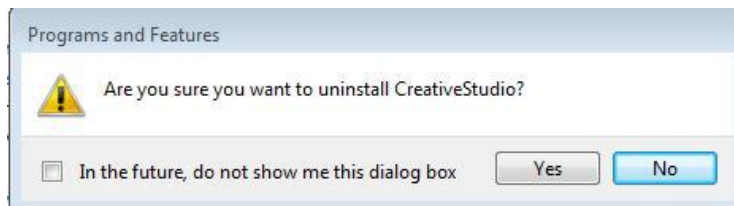


f. Restart the computer.

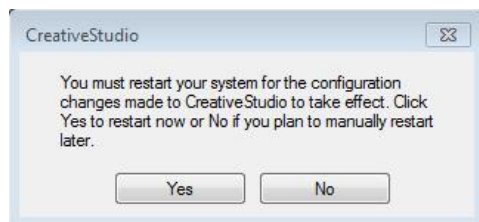

2. Save Downloaded file to a flash drive.

3. On the PC to be updated create a new folder in the C:\ drive named **CS Updates**.


a. Open computer from the Start Menu.

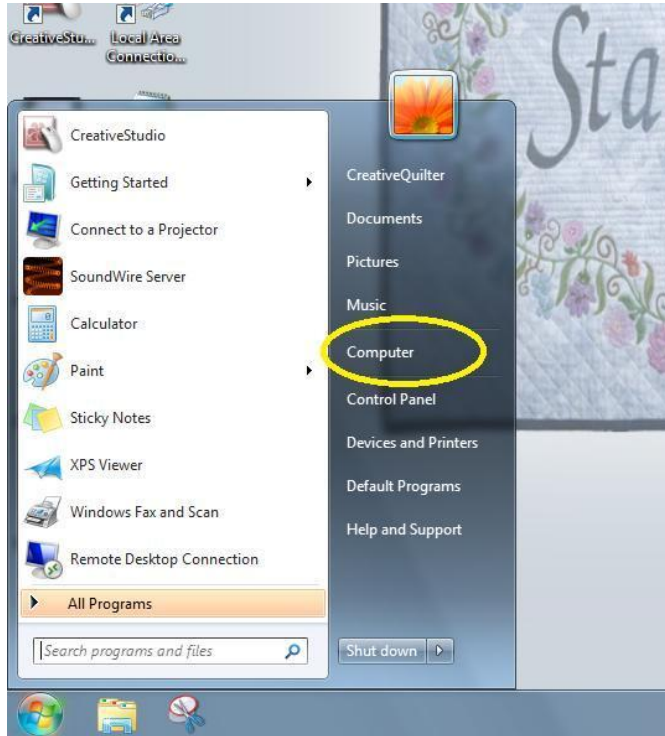


b. Click on **Local Disk C:**, may also be listed as **OS C:**

c. Right Click on Local Disk C:\ (or OS C:\) to create a new folder named **CS Updates** unless it already exists.


d. Choose **New>Folder**.

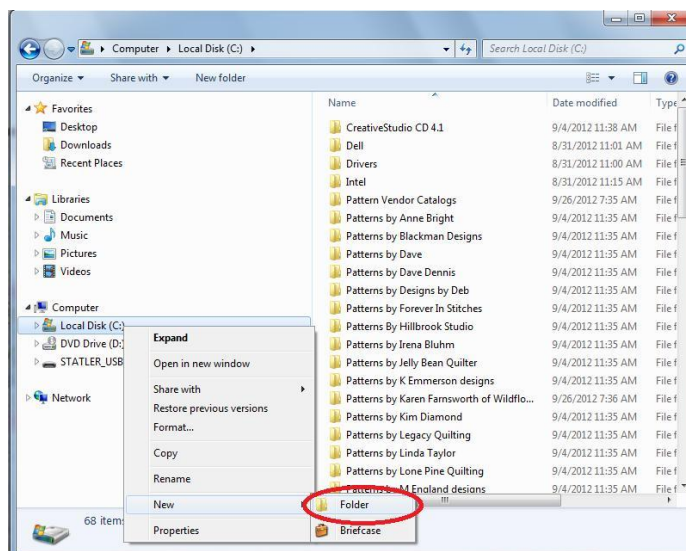


- e. Right click on the newly created folder.
 - f. Choose Rename.
 - g. Rename the folder **CS Updates**.
- 3. Insert the flash drive with the update and navigate to the flash drive to see the files.
 - 4. Copy the downloaded file from the flash drive to the CS updates folder.
 - 5. Prepare the file for use.
 - a. Right click on the copied file and choose **Extract All...**

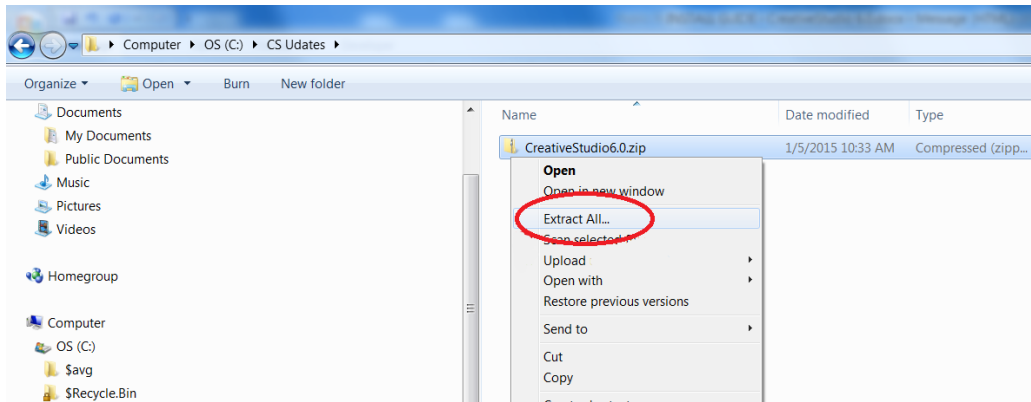

- b. Click on **Extract**.
- 6. When the extraction is complete, a new window will appear with the contents of the file.
 - 7. Right click on **the CreativeStudio 6.0 Installer.exe** pick **Run as administrator**.

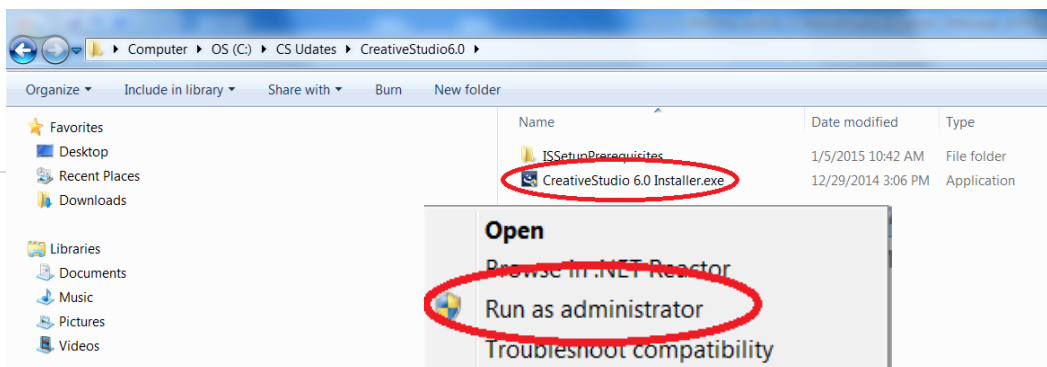


8. You may see a window like this, if so, answer **Yes**.

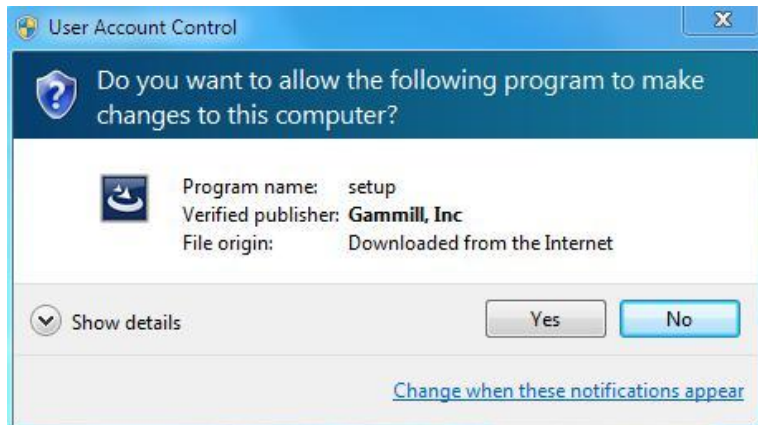

9. Wait for the Installation selection screen, this may take several minutes to appear.

10. Press **Install** to proceed with installing some pre-requisites.

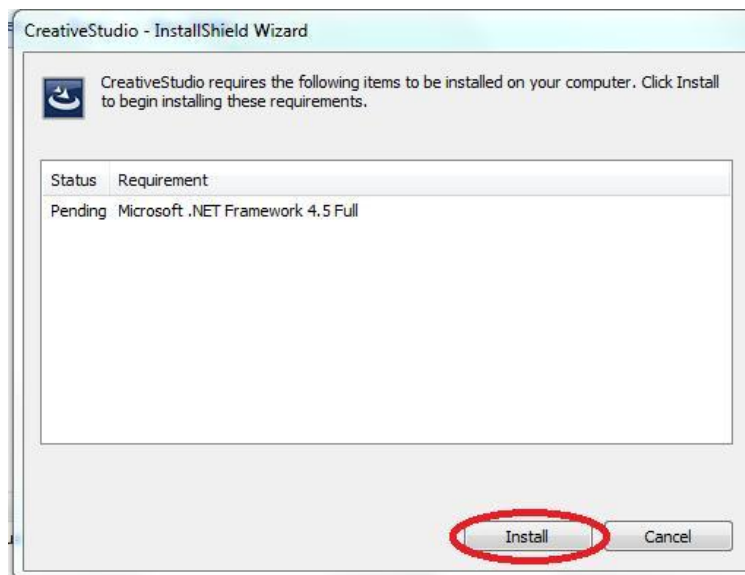

11. Choose Stand Alone Mode (**SAM**) or Stitcher Mode (**Stitcher**), depending on your installation preference. SAM is for operation without a Statler Stitcher System.



a. SAM


- i. Choose **Next** at the Screen.
- ii. Accept the License Agreement, and click **Next**.
- iii. Choose **Install** .
- iv. Wait for CreativeStudio to ask your controller type. This must match your Statler Stitcher System MOD type. Click **Next**.

b. Stitcher

- i. Choose **OK** at the Screen after the Statler Stitcher system's red and green switches are turned on.




- ii. If your controller passes the firmware requirements, click **Install**. *Otherwise Press **Cancel** and call 866-830-3738 and ask for a Firmware Upgrade Kit.*

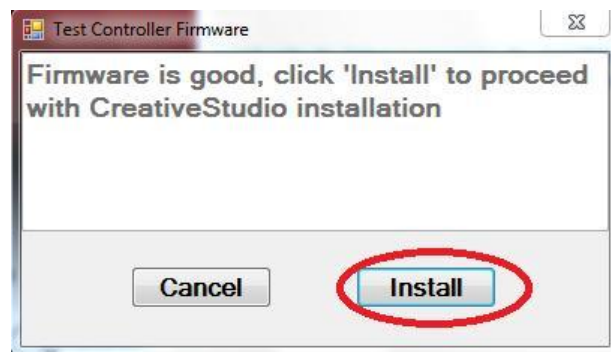


- iii. Chose **Next** to begin CreativeStudio Installation.

iv. This message may appear in Windows 8.1, click **Run anyway**

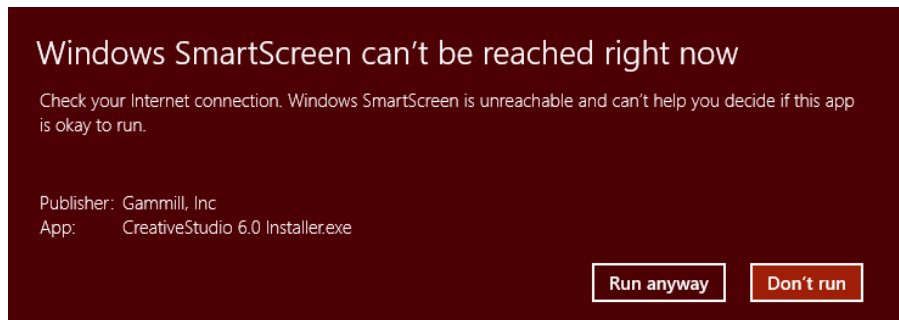

v. Accept the License Agreement, and click **Next**.


vi. If you have a large external hard drive or large flash drive installed Windows might choose to install CS there. So be sure to check that destination folder is in the C: Drive. Click **Change** if it is not C, then click **Next**.

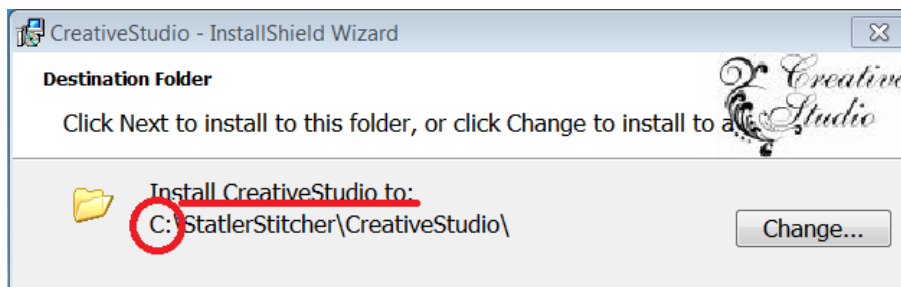

vii. Choose **Install** .

viii. Wait for CreativeStudio to ask your controller type. This must match your Statler Stitcher System MOD type. Click **Next** and wait for CreativeStudio to open.

ix. Press **Yes** to proceed with the one-time Calibrate All process.



Gammill, Inc 2015 - All Rights Reserved